



100% MADE IN THE USA

GELCOPPER™ PREINSULATED COPPER ROLL

APPLICATIONS

It perfectly fits every air conditioning, such as ductless mini-splits, VRF, heat pumps and centralized air ducted units.

TECHNICAL SPECS

INSULATION

Polyethylene closed cell foam: assures thermal insulation from surroundings.

ASTM C 1427-07 compliant

Type I (tubular)

Grade I (insulation material for use on typical commercial system non-crosslinked).

Low-density polyethylene foam: closed cells foam, CFC and HCFC gas free

Water vapor permeability: ASTM E96-00 compliant

Working temperature: ASTM C 1427-07 compliant

Wall thickness: 1/2" and 3/4"


Surface burning characteristics: UL 94, top rated – UL 723, ASTM E84 (25/50) compliant, flame and Spread Index less than 25 and Smoke Development Index less than 50 as tested according to UL 723.

R-Value: between 6.0 and 3.0 (depending on pipe diameter)

COPPER

Pipes: Manufactured according to ASTM B280

Copper: No. C122200 DHP (phosphorous deoxidized, high residual phosphorous), 99.90%.

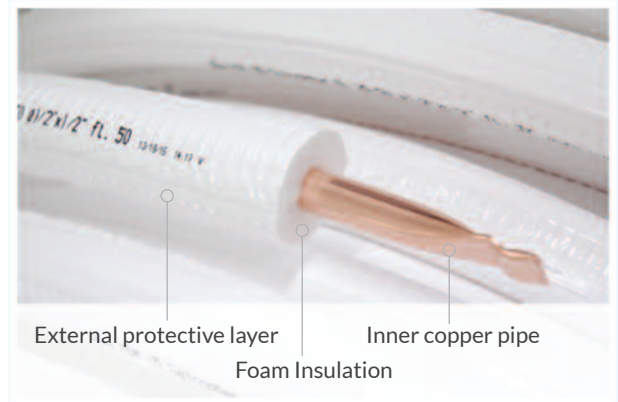

SPECIAL FEATURES

Outer Jacket: additional white polyethylene jacket cover protects foam insulation from tearing during installation process.

Marking: insulation incrementally marked by every foot to ensure accurate initial unit charge.

R410a approved: Gelcopper can be used in applications where high-pressure gases are used as refrigeration source.

UV resistant: Gelcopper is UV resistant.

Paintable: the insulation can be painted to match the surroundings.

PDM US recommends product installation under plastic duct to protect it from severe weather conditions, accidental damages or theft.



100% MADE IN THE USA

GELCOPPER™ PREINSULATED COPPER ROLL

TRY IT, LOVE IT.

PRODUCT TABLE

PDM US PART NUMBER	ROLL SIZE	INSULATION	ROLLS (per pallet)	LENGTH (of rolls)
F100.GUS145012	1/4	1/2	26	50 FT
F100.GUS385012	3/8	1/2	22	50 FT
F100.GUS125012	1/2	1/2	20	50 FT
F100.GUS585012	5/8	1/2	14	50 FT
F100.GUS345012	3/4	1/2	14	50 FT
F100.GUS785012	7/8	1/2	14	50 FT
F100.GUS1416412	1/4	1/2	10	164 FT
F100.GUS3816412	3/8	1/2	8	164 FT
F100.GUS1216412	1/2	1/2	8	164 FT
F100.GUS5816412	5/8	1/2	6	164 FT
F100.GUS348212	3/4	1/2	10	82 FT
F100.GUS788212	7/8	1/2	10	82 FT
F100.GUS145034	1/4	3/4	14	50 FT
F100.GUS385034	3/8	3/4	14	50 FT
F100.GUS125034	1/2	3/4	12	50 FT
F100.GUS585034	5/8	3/4	12	50 FT
F100.GUS345034	3/4	3/4	10	50 FT
F100.GUS785034	7/8	3/4	10	50 FT