

Overview:

The HAK+4 Engineered Hurricane Anchor Kit is a specially designed tie down system for air conditioning condensers and condenser pads. Each kit contains four L-Brackets, that tie the condenser and pad together, and two stainless steel cables, each with an earth anchor that firmly secures the condenser to the ground.

Product Specifications:


- Secures AC Condensers firmly to the ground.
- Perfect for high wind / hurricane zones.
- Each kit contains four L-Brackets and two stainless steel cables with earth anchors.
- Each Anchor can withstand over 300lbs of pulling force (when properly set in Class 4 soil).
- Use in conjunction with lightweight condenser pads to meet local codes.
- Saves time and labor.
- Made in U.S.A.

Associated Sales incorporated
TEL: 800-852-3325 • FAX: 800-782-7184


EasyANCHOR

Engineered Hurricane Anchor Kit

Tie Down System for Condensers / Pads

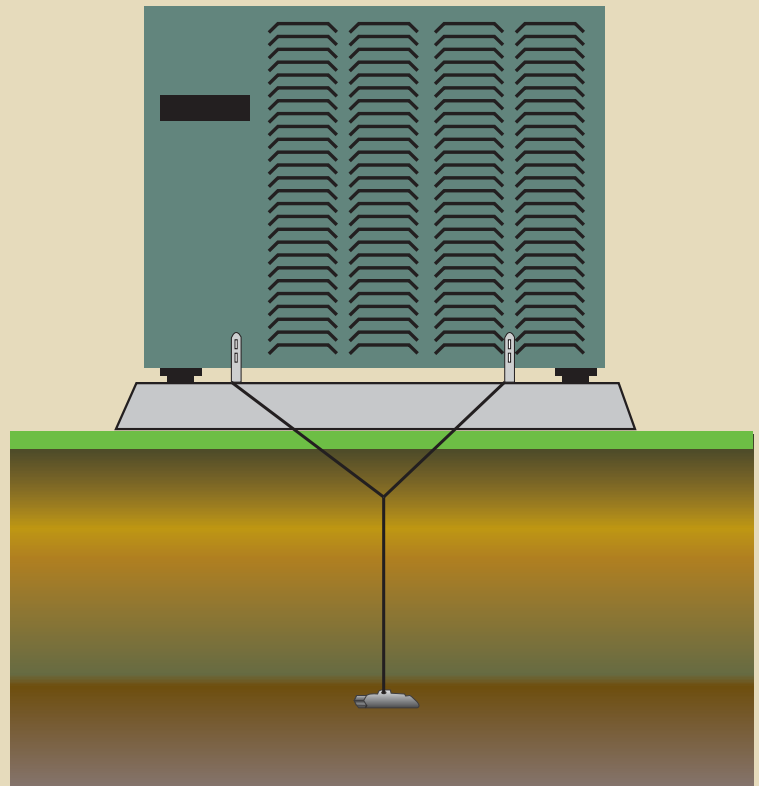

HAK+4

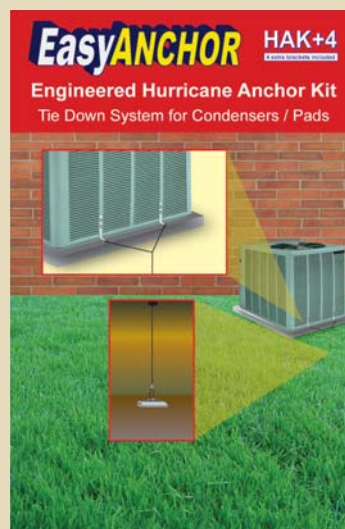

EasyANCHOR HAK+4
Engineered Hurricane Anchor Kit
Tie Down System for Condensers / Pads

Kit Contains
2 - Earth Anchors w/ 4 Brackets
4 - Add'l Tie Down Brackets

INSTALLATION INSTRUCTIONS

1. Make sure the ground slopes away from pad to reduce the possibility of water ponding around the pad.
2. Select drive point close to the edge of the pad. Use a drive rod and a hammer to drive the anchor into the ground approx 3 inches deeper than the desired final length. Diameter of the drive rod should not exceed 1/4".
3. Once driven down to the desired depth, the anchor must be "set" or "seated" by pulling up on the anchor cable. (The drive rod can be used to set the anchor by threading it through the hoops in the anchor cable and pulling up approximately 3 inches.)
4. Attach angle brackets to the outer housing of the condenser, between the louvers, being careful not to puncture the coil. Location will vary to acquire closest to 45° angle and fit between louvers.
5. Repeat installation on the opposite sides of the condenser as necessary. Extra brackets provided for securing condensing unit to plastic pads.

EasyAnchor Engineered Hurricane Anchor Kits are designed to exceed pulling force in excess of 300 pounds when 3/2 anchor is buried at least 13 inches into the ground. This rating is based on a Class 4 soil. Pull out rating will vary slightly depending on soil type and anchor depth.

Associated Sales **MA**